



CONNECTING WITHOUT BOUNDARIES



AVer MD330U

Medical Grade PTZ Camera



AVer MD330U is specially designed and medically certified for Telemedicine with the IEC 60601-1-2 Medical Certification. The 30X optical zoom lens with 4K output resolution delivers superb image quality. AI Noise Reduction offers a face-to-face communication experience for patients and doctors. A first in the industry, the removable camera head makes 360-degree angle close-up shooting and snapshots possible.



30X Optical Zoom



4K Output Resolution



Speedy Focus



Wide Angle PTZ



Handheld Camera Head



Short Working Distance



One-Click Pan-Tilt



One-Button Snapshot



One-Button Fill Light



Medical Certifications

Revolutionary Removable Head Design

The removable camera head design is a true revolution in telemedicine – not only can the doctor make use of the motorized remote controlled PTZ functionality, the near-site medical assistant can also simply remove the camera from the base and easily give the doctor a clear view of any difficulties to capture area of interest.




Unparalleled 30X Optical Zoom Capability

The 30X optical zoom lens picks up even the smallest of details for the doctor to precisely diagnose, thanks to a superior autofocus, zoom speed and speedy camera movements.



Outstanding 4K Resolution

The MD330U delivers ultra-clear 4K resolution imagery of the patient to the doctor and works together with the excellent 30X optical zoom to allow doctors to make accurate remote diagnoses.

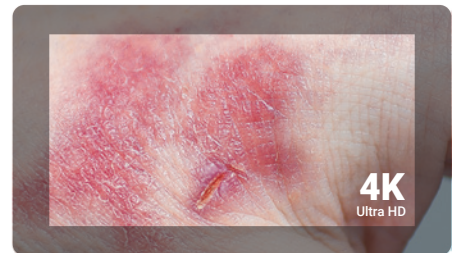

AI Acoustics

With an integrated speakerphone and microphone, the MD330U is equipped with an all-in-one audio system. AVer's in-house AI Noise Deduction technology makes communication smooth and telemedicine sessions stress free.



Medical Grade Certification

The IEC 60601-1-2 medical certification not only ensures stability and safety of the MD330U, but also guarantees the compatibility of other medical grade devices with the MD330U.



Product Specifications

Part no. 61S3310000AC
 EAN code 4719552127306

Camera		Speaker	
Image Sensor	1/2.8" 4K Exmor CMOS	Embedded Speaker	Yes
Effective Picture Elements	8 Megapixels	SPL	77 dB SPL (1W / 1m)
Output Resolutions	4K/30 (IP/UVC only), 1080p/60, 1080p/59.94, 1080p/50, 1080p/30, 1080p/29.97, 1080p/25, 720p/60, 720p/59.94, 720p/50, 720p/30	Maximum SPL	90 dB SPL at 0.5 m
Minimum Illumination	0.7 lux (IRE50, F1.6, 30fps)	Microphone	
S/N Ratio	≥ 50 dB	Built-in Microphone	2 (Omnidirectional)
Gain	Auto, Manual	AI Noise Reduction	Yes
Shutter Speed	1/1 to 1/10,000 sec	Pickup Range	5 m
Exposure Control	Auto, Manual, Priority AE (Shutter, IRIS), BLC, WDR	Sensitivity	-33 dBFS
White Balance	Auto, Manual	Frequency Response	20 Hz to 20 KHz
Optical Zoom	30X	Maximum SPL	133 dB SPL at 0.5 m
Viewing Angles	DFOV : 75.5° (Wide) to 3.1° (Tele)	Loop Recording	
	HFOV : 68.0° (Wide) to 2.7° (Tele)	Resolution	Up to 4K
	VFOV : 41.7° (Wide) to 1.5° (Tele)	Length of Video	5 minutes
Focal Length	f = 4.3 mm (Wide) to 129 mm (Tele)	Recording Modes	Loop & continuous
Aperture (Iris)	F = 1.6 (Wide) to 4.7 (Tele)	Loop Mechanism	Wipe the oldest clip
Minimum Working Distance	0.01 m (Wide), 1.2 m (Tele)	IP Streaming	
Pan / Tilt Angles	Pan : ±170°, Tilt: +90° / -35°	Resolution	4K 30fps
Pan / Tilt Speed (Manual)	Pan : 0.1° to 100° / sec, Tilt: 0.1° to 100° / sec	Network Video Compress Formats	H.264, H.265
Presets Speed	Pan : 200° / sec, Tilt: 200° / sec	Maximum Frame Rate	4K 30fps
Presets Positions	10 (IR), 256 (RS-232 / IP)	Network Interface	10 / 100 / 1000 Base-T
Camera Control - Protocols	VISCA (RS-232 / IP), PELCO-D & PELCO-P (RS-232), CGI (IP)	Multi-Stream Capability	2 (RTSP / Web Page), 4K 30fps (max.)
Image Processing	Noise Reduction (2D / 3D), Flip, Mirror, WDR, BLC	Network Protocols	IPv4, TCP, UDP, ARP, ICMP, IGMP, HTTP, DHCP, RTP / RTCP, RTSP, RTMP, VISCA over IP
Power Frequencies	50 Hz, 60 Hz	USB	
Interface		Connector	USB 3.0
Video Outputs	HDMI, IP, USB	Video Format	MJPEG · YUY2
Audio Outputs	HDMI, IP, USB	Audio Format	PCM
General		USB Video Class (UVC)	UVC 1.1
Power Requirement	AC 100 - 240V to DC 12V / 3.34A	USB Audio Class (UAC)	UAC 1.0
Power Consumption	36W	Software Tools	
Dimensions (W x H x D)	168 x 205 x 126 mm	IP Search and Configuration Tool	Support Windows® 7 or later
Net Weight	1.95 kg	Warranty	
Application	Indoor	Camera	3 Years
Tally Lamp	N / A	Accessories	1 Year
Security	Kensington Slot	Package Contents	
Remote Control	Infrared	Camera, Remote Control, Power Adapter, Power Cord, Screws (x2), USB Cable, Quick Start Guide	
Operating Conditions	Temperature : 0 °C to +35 °C; Humidity : 20% to 80%		
Storage Conditions	Temperature : -20 °C to +60 °C; Humidity : 20% to 95%		

* Specifications may vary depending on location and are subject to change without notice.

Product Appearance

Front



- 1. Removable Camera Lens
- 2. Speaker
- 3. Microphone Array
- 4. LED Indicator
- 5. Mode Switch Button

Back



- 1. USB Type-A for Camera Connection
- 2. RJ45
- 3. USB 3.0 Type-B
- 4. HDMI
- 5. USB Type-A
- 6. microSD Card Slot
- 7. RS-232
- 8. DC 12V
- 9. Kensington Slot

Camera



- 1. Snapshot Button
- 2. Fill Light Button



©2023 AVer Information Europe B.V. All rights reserved.
 All brand names and logos are trademarks of their respective companies.



Distributor/Dealer